




Приватне Підприємство
«КОМПАНІЯ САНРАЙЗ»

ЄДРПОУ 36372819
 Україна, м. Харків, вул. Ковтуна,52

р/р 26005176272
 МФО 380805
 АТ «Райффайзен Банк Аваль» м. Харків

Тел.: +38 (067) 7318107
 Факс: +38 (067) 2369589
 @mail: office@selhozmash.com
 WWW: www.selhozmash.com

OIL FILTER

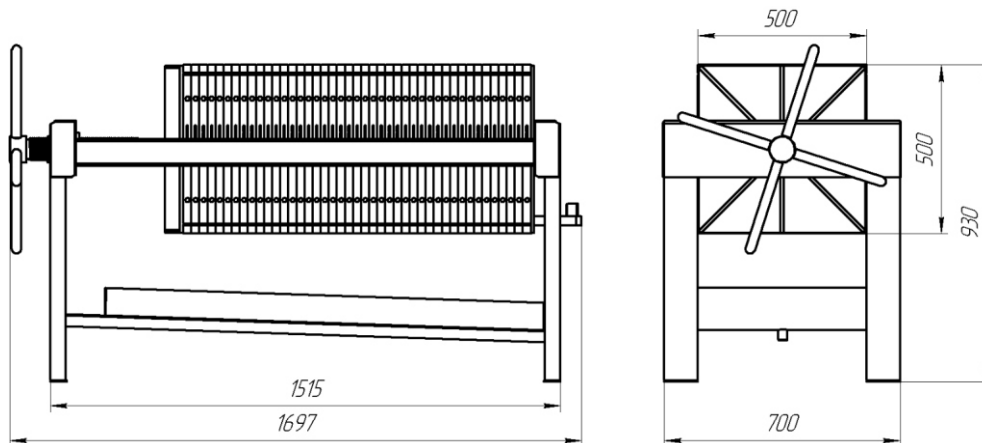

The important part of vegetable oil processing is refinement. The fine refinement of oil is made by frame-construction press-filters that we manufacture. A press-filter can be used any time you need to divide the solid and liquid phases of middle- and poor-pressing suspensions by means of filtration under pressure. Raw oil is fed into a press-filter through a feed pipeline in filter plates by means of a pump, which is delivered with the unit. Withdrawal of filtrate is closed and is made through a lateral pipeline. When removing residue the plates are moved in one side only either by hand or electromechanically on demand of a customer. Regeneration of filter partitions is made by hand in order to clean belting fabric. The area of surface to be filtered is chosen individually and depends on the needs of a customer and the productivity of an oil shop.

№	Characteristics	Unit measure	Filter model MFR (МФР)
1	Productivity under t=600C under t=300C	litre/hour	100-500 50-250
2	Power of pump electrical motor	kilowatt	0,4
3	Voltage	volt	220
4	Weight	kg	860
5	Service personnel	person	1
6	Dimensions	mm	1400x700x950